

# INSTALLATION

## FLOOR DRAIN GASKET AND BOWL UNIT

1. Install wax ring on floor drain and seal well.  
(see figure 1)
2. Carefully install bowl unit on socket.  
(see figure 2)

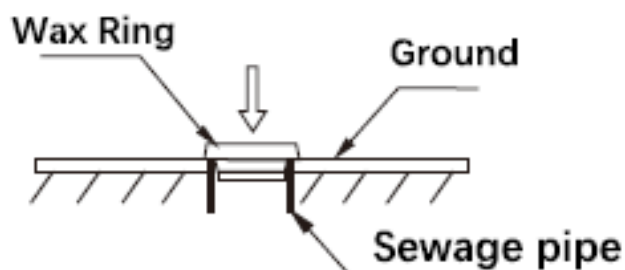


Figure 1

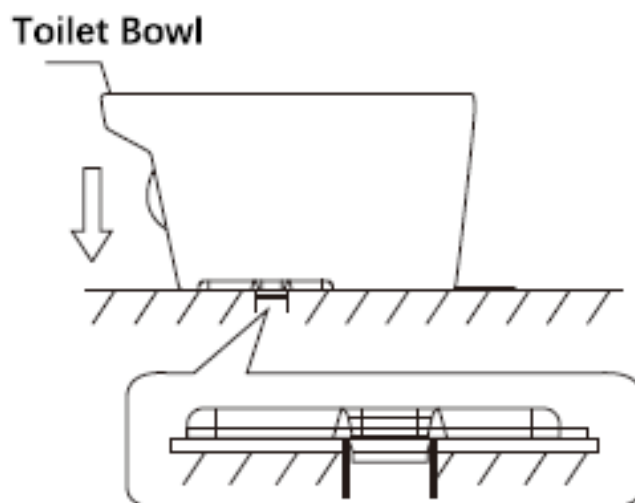


Figure 2

## WATER SUPPLY

1. Turn off water shut off valve
2. Attach provided angle filter to the shut off valve, use provided connector fitting if necessary
3. Turn on the valve for a minute to keep inside of valve clean
4. Turn off the valve, connect the filter and the unit with pipe, turn on the valve again, carefully check for leakage




Figure 3

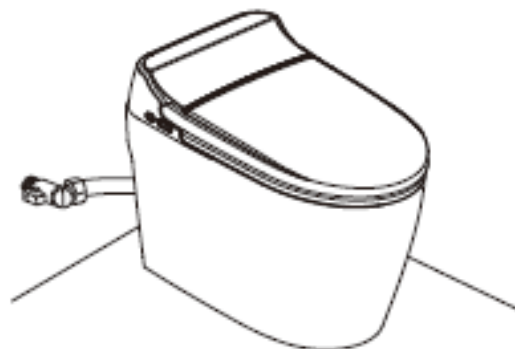


Figure 4

Filter screen should be cleaned with clear water every three months

Steps to clean filter screen: Turn off the valve, unscrew filter screen, carefully rinse with clean water.

Pipe and valve could be different from above graphic, due to production batches, please refer to actual product

## SEAL THE BOWL UNIT

Seal the gap between toilet and the ground, to further prevent water and odor leakage. Evenly apply a layer of general-purpose sealant (not included with the unit) around bottom of toilet, smooth the sealant with finger. Allow the sealant to dry for at least 24 hours. (Follow instructions of specific sealant used for installation.)

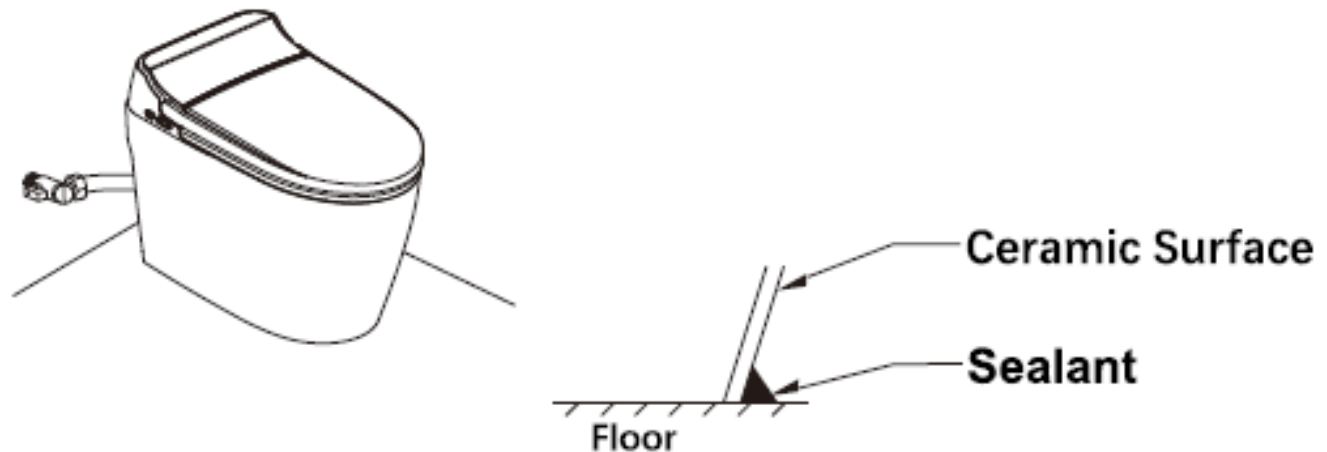


Figure 5

## CONNECT POWER CORD

1. Power cord must be connected to a 120V, 60Hz, 16A+, grounded GFI (Ground Fault Circuit Interrupter) power socket,
2. Wait for the unit to finish self-inspection after connected. It is normal that user see side button flash blue light, nozzle stretch out, machine engage on and flash sound.
3. User should do a trial run after self-inspection is done.

